



# CATEGORIES IN CONTROL

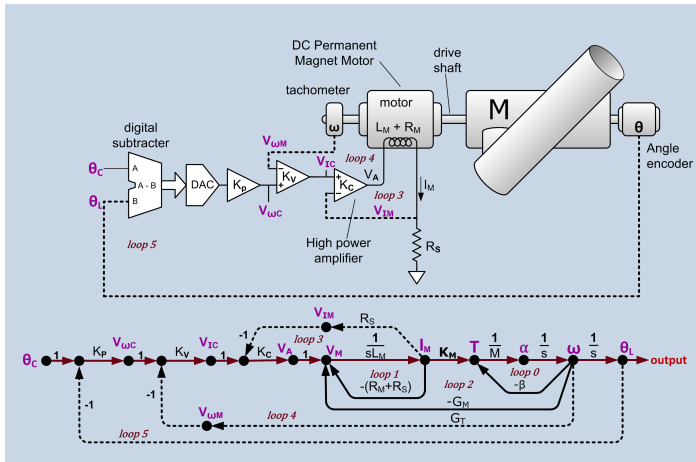


John Baez, Jason Erbele & Nick Woods  
 Higher-Dimensional Rewriting and Applications  
 Warsaw, 28 June 2015

We have left the Holocene and entered a new epoch, the **Anthropocene**, when the biosphere is rapidly changing due to human activities.

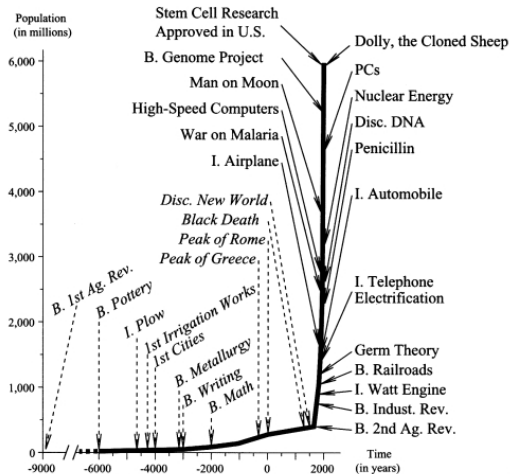

According to the [2014 IPCC report](#) on climate change, to surely stay below 2 °C of warming, we need a *more than 100% reduction in carbon emissions...*

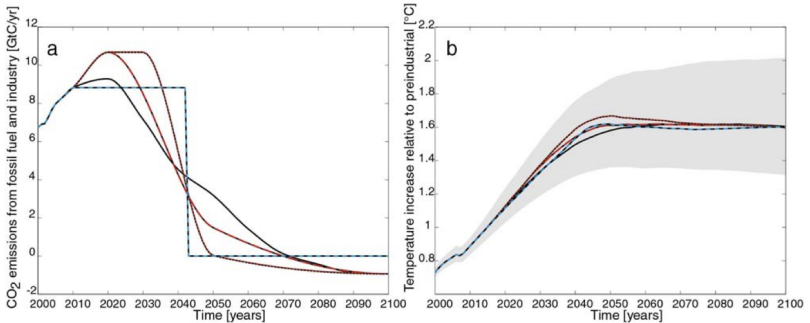


...unless we completely stop carbon emissions by 2040.

So, we can expect that in this century, scientists, engineers and mathematicians will be increasingly focused on *biology*, *ecology* and *complex networked systems* — just as the last century was dominated by physics.

**What can category theorists contribute?**


**To understand ecosystems, ultimately will be to understand networks. — B. C. Patten and M. Witkamp**

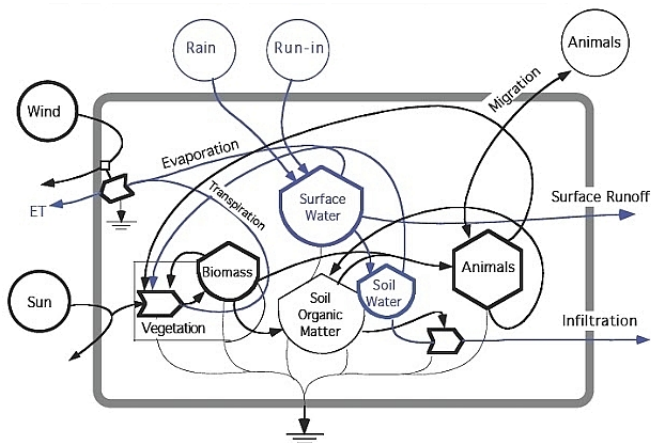

We need a good mathematical theory of networks.

The category with vector spaces as objects and linear maps as morphisms becomes symmetric monoidal with the usual  $\otimes$ .


In quantum field theory, 'Feynman diagrams' are pictures of morphisms in this symmetric monoidal category:

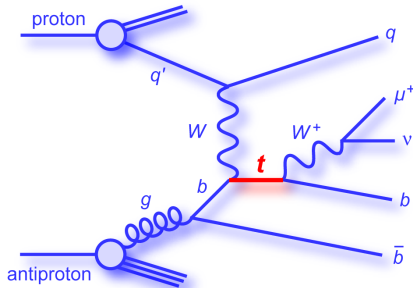

But the category of vector spaces also becomes symmetric monoidal with direct sum,  $\oplus$ , as its 'tensor product'. This is more important in electrical engineering and **control theory**: the art of getting systems to do what you want.


Control theorists use 'signal-flow diagrams' to describe how signals flow through a system and interact.

For example, an upside-down pendulum on a cart:

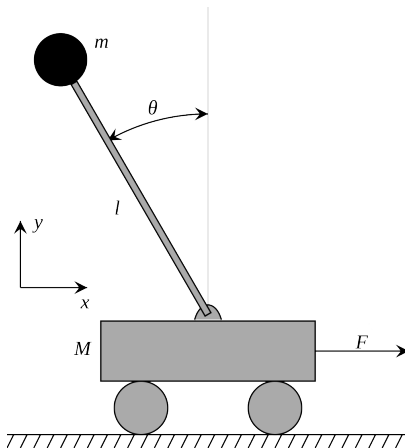

has the following signal-flow diagram...



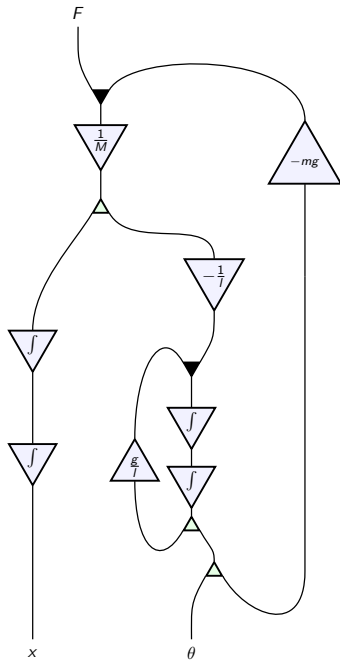


To formalize this, think of a signal as a smooth real-valued function of time:

$$f: \mathbb{R} \rightarrow \mathbb{R}$$


We can multiply a signal by a constant and get a new signal:



We can integrate a signal:



Here is the signal-flow diagram for the simplest machine in the world: a *rock*!



Integration introduces an ambiguity: the constant of integration. But electrical engineers often use Laplace transforms to write signals as linear combinations of exponentials


$$f(t) = e^{-st} \quad \text{for some } s > 0$$

Then they define

$$(\int f)(t) = \frac{e^{-st}}{s}$$

This lets us think of integration as a special case of scalar multiplication! We extend our field of scalars from  $\mathbb{R}$  to  $\mathbb{R}(s)$ , the field of rational real functions in one variable  $s$ .

Let us be general and work with an arbitrary field  $k$ . The simplest kind of signal-flow diagram with  $m$  input edges and  $n$  output edges:



stands for a linear map

$$F: k^m \rightarrow k^n$$


In other words: it's a string diagram for a morphism in  $\mathbf{FinVect}_k$ , the category of finite-dimensional vector spaces over  $k$ ... *where we make this into a monoidal category using  $\oplus$ , not  $\otimes$ .*

## Lemma (Jason Erbele)

The category **FinVect**<sub>k</sub>, with

- ▶ finite-dimensional vector spaces over  $k$  as objects,
- ▶ linear maps as morphisms,

is symmetric monoidal with  $\oplus$  as its tensor product. It is generated as a symmetric monoidal category by one object,  $k$ , and these morphisms:

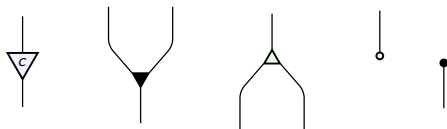

where  $c \in k$ .

1. For each  $c \in k$  we can multiply numbers by  $c$ :



This is a notation for the linear map

$$\begin{array}{ccc} c: k & \rightarrow & k \\ x & \mapsto & cx \end{array}$$




2. We can add numbers:



This is a notation for the linear map

$$\begin{aligned} +: \quad k \oplus k &\rightarrow k \\ (x, y) &\mapsto x + y \end{aligned}$$

3. We can **duplicate** a number:



This is a notation for the linear map

$$\begin{aligned}\Delta: \quad k &\rightarrow k \oplus k \\ x &\mapsto (x, x)\end{aligned}$$

4. We can **delete** a number:



This is a notation for the linear map

$$\begin{array}{lcl} !: & k & \rightarrow \{0\} \\ & x & \mapsto 0 \end{array}$$

5. We have the number zero:



This is a notation for the linear map

$$\begin{array}{rclcl} 0: & \{0\} & \rightarrow & k \\ & 0 & \mapsto & 0 \end{array}$$

In fact we know what relations these generating morphisms obey:

### Theorem (Erbele)


**FinVect**<sub>*k*</sub> is the free symmetric monoidal category on a bicommutative bimonoid over *k*.

The jargon here is a terse way to list the relations obeyed by scalar multiplication, addition, duplication, deletion and zero. In detail...




**(1)–(3)** Addition and zero make  $k$  into a commutative monoid:



**(4)–(6)** Duplication and deletion make  $k$  into a cocommutative comonoid:




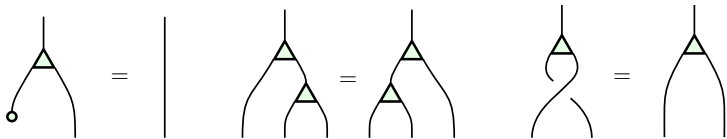


**(7)–(10)** The monoid and comonoid structures on  $k$  fit together to form a bimonoid:









**(11)–(14)** The rig structure of  $k$  can be recovered from the generating morphisms:




**(15)–(18)** Scalar multiplication by  $c \in k$  commutes with the generating morphisms:



*These are all the relations we need!*

However, control theory also needs more general signal-flow diagrams, which have ‘feedback loops’:

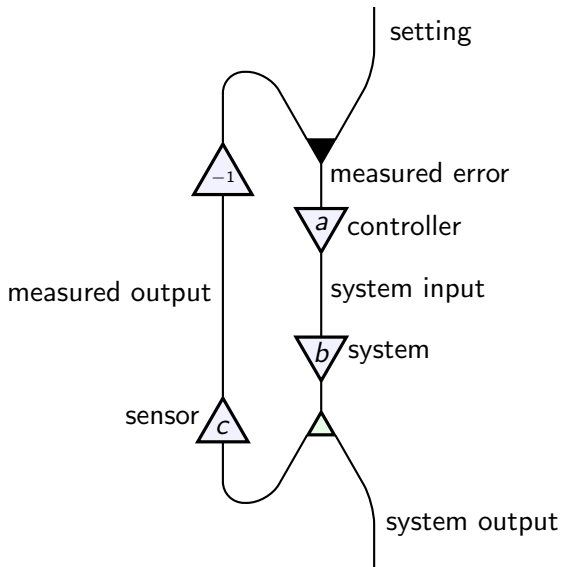

Feedback is the most important concept in control theory: letting the output of a system affect its input. For this we should let wires 'bend back':



These aren't linear maps — they're linear *relations*!

A **linear relation**  $F: U \rightsquigarrow V$  from a vector space  $U$  to a vector space  $V$  is a linear subspace  $F \subseteq U \oplus V$ .

We can compose linear relations  $F: U \rightsquigarrow V$  and  $G: V \rightsquigarrow W$  and get a linear relation  $G \circ F: U \rightsquigarrow W$ :

$$G \circ F = \{(u, w): \exists v \in V \quad (u, v) \in F \text{ and } (v, w) \in G\}.$$

A linear map  $\phi: U \rightarrow V$  gives a linear relation  $F: U \rightsquigarrow V$ , namely the graph of that map:

$$F = \{(u, \phi(u)) : u \in U\}$$

Composing linear maps becomes a special case of composing linear relations.

There is a category **FinRel**<sub>*k*</sub> with finite-dimensional vector spaces over the field *k* as objects and linear relations as morphisms.

**FinRel**<sub>*k*</sub> becomes symmetric monoidal using  $\oplus$ . It has **FinVect**<sub>*k*</sub> as a symmetric monoidal subcategory.

Fully general signal-flow diagrams are pictures of morphisms in **FinRel**<sub>*k*</sub>, typically with  $k = \mathbb{R}(s)$ .

Erbele showed that besides the generators of  $\mathbf{FinVect}_k$  we only need two more morphisms to generate  $\mathbf{FinRel}_k$ :

6. The **cup**:



This is the linear relation

$$\cup: k \oplus k \rightsquigarrow \{0\}$$

given by

$$\cup = \{(x, x, 0) : x \in k\} \subseteq k \oplus k \oplus \{0\}$$

7. The **cap**:



This is the linear relation

$$\cap: \{0\} \rightsquigarrow k \oplus k$$

given by

$$\cap = \{(0, x, x) : x \in k\} \subseteq \{0\} \oplus k \oplus k$$




## Lemma (Erbele)

The category **FinRel**<sub>k</sub>, with

- ▶ *finite-dimensional vector spaces over  $k$  as objects,*
- ▶ *linear relations as morphisms,*

*is symmetric monoidal with  $\oplus$  as its tensor product. It is generated as a symmetric monoidal category by one object,  $k$ , and these morphisms:*




## Theorem (Erbele, Bonchi–Sobociński–Zanasi)

**FinRel**<sub>*k*</sub> is the free symmetric monoidal category on a pair of interacting bimonoids over *k*.

Besides the relations we've seen so far, this statement summarizes the following extra relations:


**(19)–(20)**  $\cap$  and  $\cup$  obey the zigzag relations:

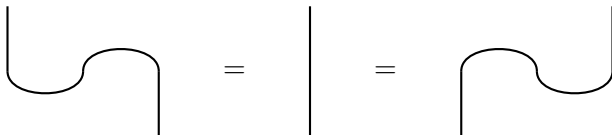

It follows that  $(\mathbf{FinRel}_k, \oplus)$  becomes a **dagger-compact category**, so we can ‘turn around’ any morphism  $F: U \rightsquigarrow V$  and get its **adjoint**  $F^\dagger: V \rightsquigarrow U$ :


$$F^\dagger = \{(v, u) : (u, v) \in F\}$$

For example, turning around duplication  $\Delta: k \rightarrow k \oplus k$  gives **coduplication**,  $\Delta^\dagger: k \oplus k \rightsquigarrow k$ :

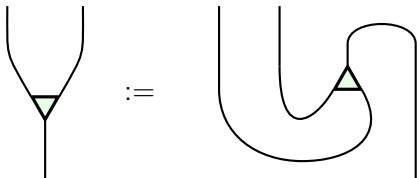


$$\Delta^\dagger = \{(x, x, x)\} \subseteq (k \oplus k) \oplus k$$


**(21)–(22)**  $(k, +, 0, +^\dagger, 0^\dagger)$  is a Frobenius monoid:

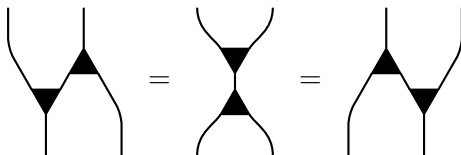


**(23)–(24)**  $(k, \Delta^\dagger, !^\dagger, \Delta, !)$  is a Frobenius monoid:

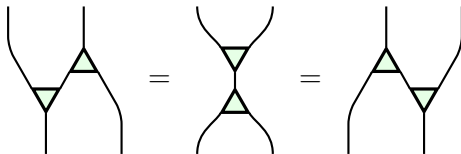


**(25)–(26)** The Frobenius monoid  $(k, +, 0, +^\dagger, 0^\dagger)$  is extra-special:

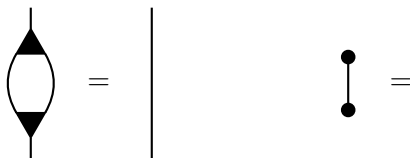

**(27)–(28)** The Frobenius monoid  $(k, \Delta^\dagger, !^\dagger, \Delta, !)$  is extra-special:

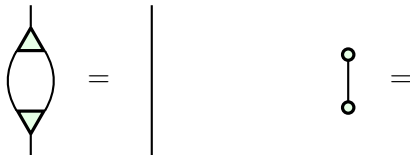


**(29)**  $\cup$  with a factor of  $-1$  inserted can be expressed in terms of  $+$  and  $0$ :



**(30)**  $\cap$  can be expressed in terms of  $\Delta$  and  $!$ :



**(31)** For any  $c \in k$  with  $c \neq 0$ , scalar multiplication by  $c^{-1}$  is the adjoint of scalar multiplication by  $c$ :





A **PROP** is a symmetric monoidal category with natural numbers as objects, the tensor product on objects being addition.

The symmetric monoidal category **FinVect**<sub>*k*</sub> is equivalent to the PROP **Mat**(*k*), where a morphism  $f: m \rightarrow n$  is an  $n \times m$  matrix with entries in *k*.

However, we can define **Mat**(*k*) whenever *k* is a rig. We have:

**Theorem (Simon Wadsley and Nick Woods)**

**Mat**(*k*) is the PROP for bicommutative bimonoids over *k*.

To understand this, note that for any bicommutative bimonoid  $A$  in a symmetric monoidal category  $\mathbf{C}$ , the bimonoid endomorphisms  $f: A \rightarrow A$  can be added and composed, giving a rig  $\text{End}(A)$ .

A bicommutative bimonoid **over  $k$**  in  $\mathbf{C}$  is one equipped with a rig homomorphism

$$\Phi_A: k \rightarrow \text{End}(A)$$

Bicommutative bimonoids over  $k$  in  $\mathbf{C}$  form a category where a morphism  $f: A \rightarrow B$  is a bimonoid homomorphism such that for each  $c \in k$  the square

$$\begin{array}{ccc}
 A & \xrightarrow{\Phi_A(c)} & A \\
 f \downarrow & & \downarrow f \\
 B & \xrightarrow{\Phi_B(c)} & B
 \end{array}$$

commutes.

Wadsley and Woods proved that this category is equivalent to the category of algebras of the PROP  $\mathbf{Mat}(k)$  in  $\mathbf{C}$ .

Example: the commutative rig of natural numbers gives the PROP

$$\mathbf{Mat}(\mathbb{N}) \simeq \mathbf{FinSpan}$$

equivalent to the symmetric monoidal category of finite sets and spans, with disjoint union as tensor product.


[Steve Lack](#) showed that this is the PROP for bicommutative bimonoids. But this also follows from the result of Wadsley and Woods.

Example: the commutative rig of booleans  $\mathbb{B} = \{F, T\}$ , with  $\vee$  as addition and  $\wedge$  as multiplication, gives the PROP

$$\mathbf{Mat}(\mathbb{B}) \simeq \mathbf{FinRel}$$


equivalent to the symmetric monoidal category of finite sets and relations, with disjoint union as tensor product.

Samuel Mimram showed that this is the PROP for **special** bicommutative bimonoids, meaning those where



Again, this follows from the general result of Wadsley and Woods.

Example: the commutative ring of integers  $\mathbb{Z}$  gives the PROP  $\mathbf{Mat}(\mathbb{Z})$ . This is the PROP for bicommutative Hopf monoids. The key here is that scalar multiplication by  $-1$  obeys the axioms for an antipode:

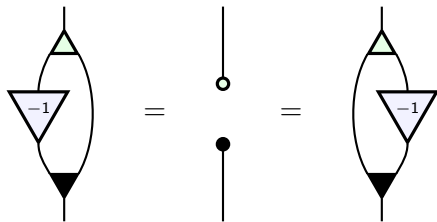

More generally, whenever  $k$  is a commutative ring, the presence of  $-1 \in k$  guarantees that  $\mathbf{Mat}(k)$  is the PROP for Hopf monoids over  $k$ .

So, there's no shortage of beautiful category theory and rewrite rules hiding in control theory.

Next: use them to help control theorists and save the world!